



Handles and handlevers

Index

System description page 3

Joints-handle table page 4

Handles

- P series page 5

- H series page 11

- S series page 17

- V series page 23

- J series page 25

- 10 series page 27

Handlevers

- Without microswitches. page 29

- With microswitch and J series handle page 31

- With microswitch and 10 series handle page 32

- Handlevers with P series handle page 33

Additional information

This catalogue shows the product in the most standard configurations.
Please contact our Sales Dpt. for more detailed information or special requests.

WARNING!

All specifications of this catalogue refer to the standard product at this date.
Walvoil, oriented to a continuous improvement, reserves the right to
discontinue, modify or revise the specifications, without notice.

**WALVOIL IS NOT RESPONSIBLE FOR ANY DAMAGE CAUSED BY AN
INCORRECT USE OF THE PRODUCT.**

2nd edition March 2015


System description

Walvoil offers a wide range of handles and handlevers, designed to ensure maximum reliability and comfort thanks to their ergonomic profile and high versatility.

The Walvoil handles are designed to be mounted on the range of control devices such as hydraulic and electronic joysticks and remote controls for flexible cable.

Depending on the model, they can be configured with on/off devices (eg. push-buttons, rocker switches), proportional devices (eg. rollers), and LED signal.

Handlevers line allows to satisfy all Walvoil directional valve range; they are available with several shapes and lengths, with or without microswitches.

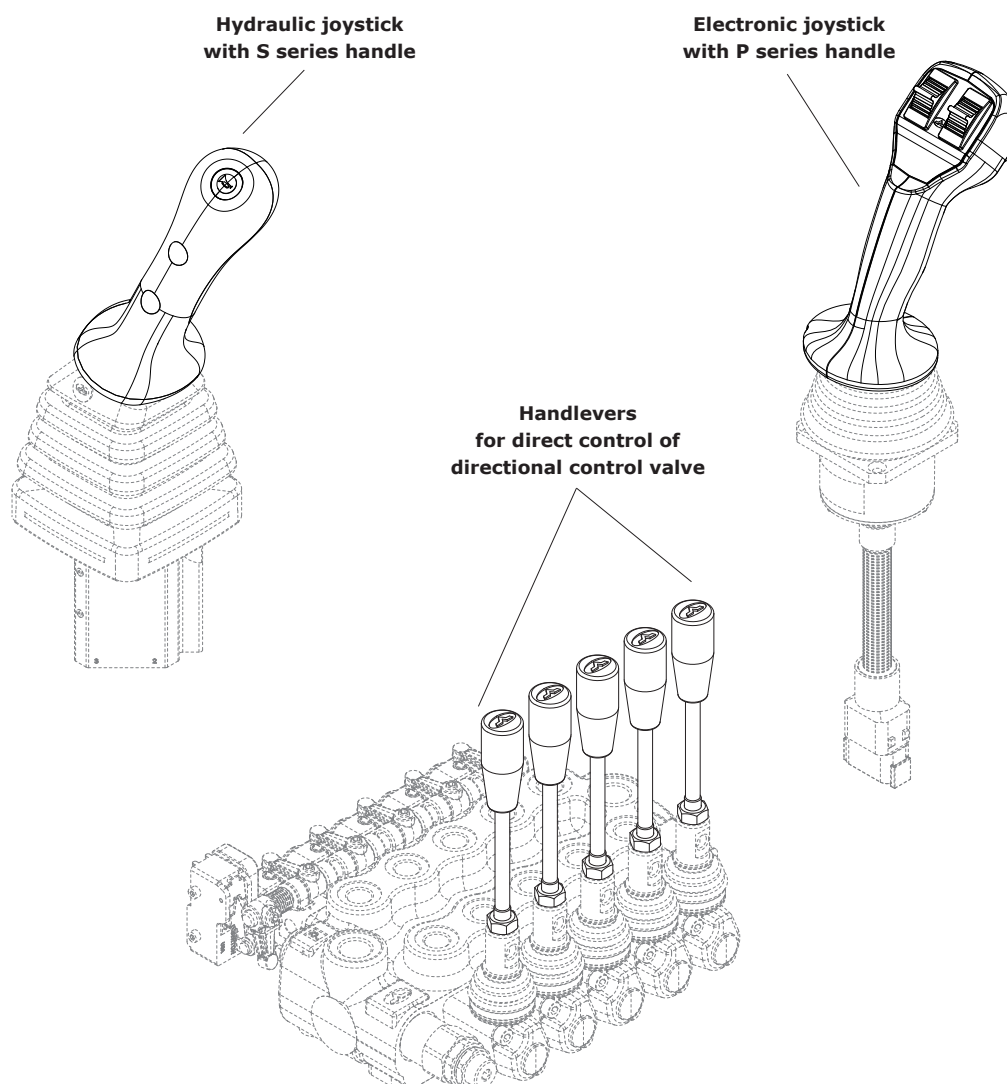

General features		P series	H series	S series	V series	J series	10 series
ON/OFF* functions	push-button	8	8	4	1	1	1
	rocker switch	2	2	-	-	1	1
Proportional functions*		2	1	1	-	-	-
Dead man		•	•	-	-	-	-
Max. current rating		16 A	7A	7A	4A	6A	6A

(*) Max. number of functions

Handles and handlevers

Joists-handle table

Joint		Handle								
Type	Description	Code	tightening on handle wrench/ tightening torque	tightening on pilot control valve wrench/tightening torque	P series	H series	S series	V series	J series	10 series
3	SVM100	5GIU714763	22 mm/32 Nm 0.87 in /23.6 lbft	24 mm/24 Nm 0.94 in /17.7 lbft	•	•	-	•	-	•
4	For SCF031	5AST281416	22 mm/32 Nm 0.87 in /23.6 lbft	22 mm/32 Nm 0.87 in /23.6 lbft	•	•	-	•	-	•
7	For SVM400-SVM400EMD-SVM430-SVM450-SVM600 sloping 19° left	5GIU714563	22 mm/24 Nm 0.87 in /17.7 lbft	22 mm/60 Nm 0.87 in /44.2 lbft	•	•	•	•	-	-
8	For SVM400-SVM400EMD-SVM430-SVM450-SVM600 sloping 19° right	5GIU714563	22 mm/24 Nm 0.87 in /17.7 lbft	22 mm/60 Nm 0.87 in /44.2 lbft	•	•	•	•	-	-
9	For SVM400-SVM400EMD-SVM430	5PER524701	24 mm/24 Nm 0.94 in /17.7 lbft	20 mm/24 Nm 0.79 in /17.7 lbft	•	•	•	•	-	•
E	For SVM400-SVM400EMD-SVM430 sloping 30° left	5GIU715630	22 mm/22 Nm 0.87 in /16.23 lbft	20 mm/60 Nm 0.79 in /44.2 lbft	•	•	•	•	-	-
F	For SVM400-SVM400EMD-SVM430 sloping 30° right	5GIU715630	22 mm/22 Nm 0.87 in /16.23 lbft	20 mm/60 Nm 0.79 in /44.2 lbft	•	•	•	•	-	-
G	For SVM400EMD	5GIU714501	22 mm/24 Nm 0.87 in /17.7 lbft	30 mm/42 Nm 1.18 in /30.98 Nm	•	•	•	•	-	-
H	For SVM400-SVM400EMD-SVM430 sloping 19° forward	5GIU714563	22 mm/24 Nm 0.87 in /17.7 lbft	22 mm/60 Nm 0.87 in /44.2 lbft	•	•	•	•	-	-
I	For SVM400-SVM400EMD-SVM430 sloping 19° reverse	5GIU714563	22 mm/24 Nm 0.87 in /17.7 lbft	22 mm/60 Nm 0.87 in /44.2 lbft	•	•	•	•	-	-
L	For SVM400-SVM400EMD-SVM430 sloping 30° forward	5GIU715630	22 mm/22 Nm 0.87 in /16.23 lbft	22 mm/60 Nm 0.87 in /44.2 lbft	•	•	•	•	-	-
M	For SVM400-SVM400EMD-SVM430 sloping 30° reverse	5GIU715630	22 mm/22 Nm 0.87 in /16.23 lbft	22 mm/60 Nm 0.87 in /44.2 lbft	•	•	•	•	-	-
-	For SVM100-SVM150	5AST271217	-	19 mm/manual 0.75 in /manual	-	-	-	-	•	-

For control devices not included in the catalogue

Joint		Handle								
Type	Description	Code	tightening on handle wrench/ tightening torque	tightening on pilot control valve wrench/tightening torque	P series	H series	S series	V series	J series	10 series
1	For SV01	5PER524700	22 mm/32 Nm 0.87 in /23.6 lbft	24 mm/24 Nm 0.94 in /17.7 lbft	•	•	-	•	-	•
3	For SV10	5GIU714763	22 mm/32 Nm 0.87 in /23.6 lbft	24 mm/24 Nm 0.94 in /17.7 lbft	•	•	-	•	-	•
5	For SV01 sloping 19° left	5GIU715600	22 mm/24 Nm 0.87 in /17.7 lbft	22 mm/60 Nm 0.87 in /44.2 lbft	•	•	-	•	-	-
6	For SV01 sloping 19° right	5GIU715600	22 mm/24 Nm 0.87 in /17.7 lbft	22 mm/60 Nm 0.87 in /44.2 lbft	•	•	-	•	-	-
C	For MDT	5GIU127381	2,5 mm/manual 0.1 in /manual	-	•	•	-	•	-	-



P series handles

- Ergonomic design
- High resistance thermoplastic resin
- Available with different proportional and ON/OFF functions
- Available with or without "dead man" trigger

General features

Body, shell and plate material	Nylon® - MZN
IP weather protection (assembled)	depending on configuration
Ambient temperature	from -20°C to 60°C / from -4°F to 140°F
UV resistance	according to IEC68-2-5, S test C procedure

Electric device features

ON/OFF push button

Version	spring return
Contact type	normally open
Current rating	2 A resistive load @ 12 VDC
Mechanical life (nr. of operations)	10 ⁶
Electric life (nr. of operations)	200x10 ³
Weather protection	IP64



"Dead man" trigger

Version	spring return
Contact type	NA
Current rating	2 A resistive 12 V
Mechanical life (nr. of operations)	10 ⁶
Electric life (nr. of operations)	200x10 ³
Weather protection	IP67



ON/OFF push button with detent

Version	with detent
Contact type	NA
Current rating	200 mA @ 12 VDC
Mechanical life (nr. of operations)	10 ⁶
Electric life (nr. of operations)	5x10 ⁵
Weather protection	IP67



Proportional roller

Supply	8-32 VDC
Max. current consumption	< 24 mA
Max. output current	1 mA
Output signal (range)	0.5 - 4.5 V
Output signal (central position)	2.5V
Signal tolerance (central position and stroke end)	±100 mV
Minimum load	10 Ω
Actuator deflection angle	± 35° (±1°)
Mechanical life (nr. of operations)	10 ⁶
Operating force	2 N
Mechanical vibration	IEC 68-2 EN 60068-2-29
Mechanical shock	(pulse 400m/s ² x 6 ms, 100 times)
Weather protection	IP67-IP69K
EMC compatibility	ISO 13766 ISO 14982



Rocker switch

Version	with detent
Contact type	on/off/on
Current rating	2 A resistive @ 12 VDC
Mechanical life (nr. of operations)	10 ⁵
Electric life (nr. of operations)	200x10 ³
Weather protection	IP68



FNR rocker switch

Version	with detent
Contact type	on/off/on
Current rating	2 A resistive @ 12 VDC
Mechanical life (nr. of operations)	10 ⁶
Weather protection	IP67



LED



Supply voltage (max.)	12V 10 mA
-----------------------	-----------




Cables

Conductor material	copper with tinned ends
Nr. of conductors	up to 12
Conductor section	from AWG16 to AWG20
Insulating material	PVC
Protective covering material	fireproof polyurethane


Dimensions

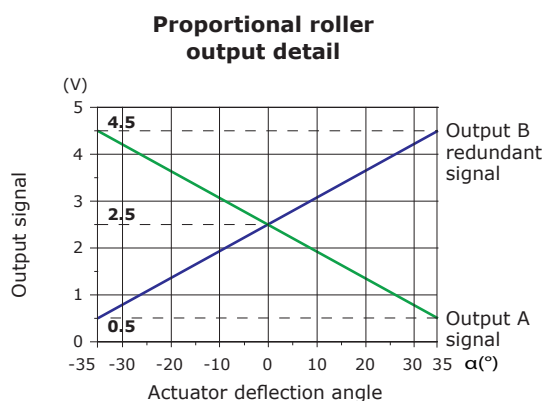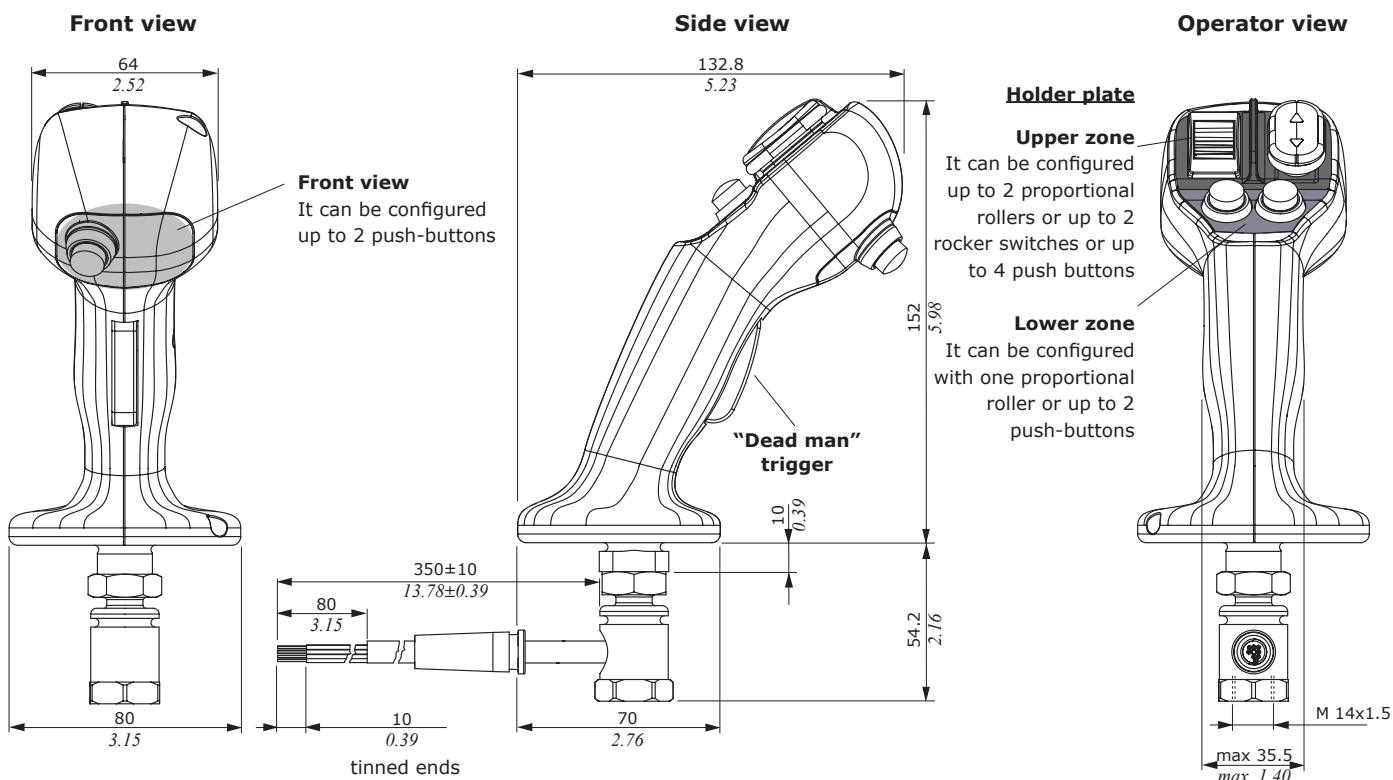



- 1) Half-shell
- 2) Hold plate
- 3) Assembling rod
- 4) Cable

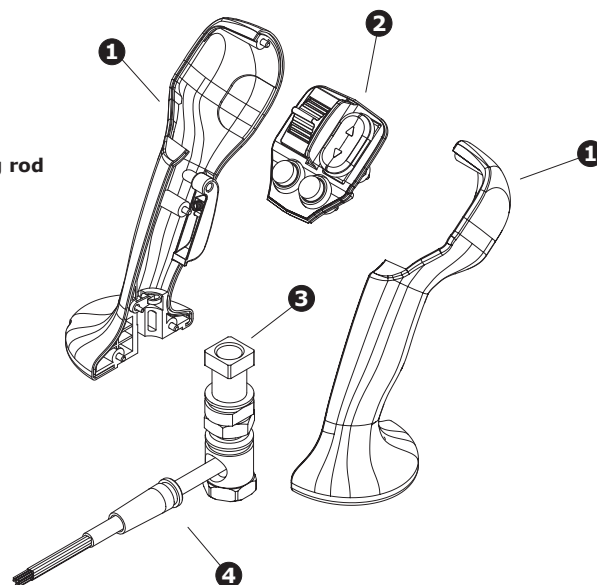



Without "dead man" trigger


	Code 2IM8020007 Description PQC6002B9-1R1(T)D035-2R1(T)D035-3R1(T)D035-4R1(T)D035-5R1(T)D035-6R1(T)D035-7R3(A)D035-8R3(A)D035-SLR035-TLV035-12VDC Holder plate 6 push-buttons with spring return (P1...P6), 2 LEDs (LS-LT) Front zone 2 detent push-buttons (P7-P8) Joint Standard for SVM400-430 joystick
---	--

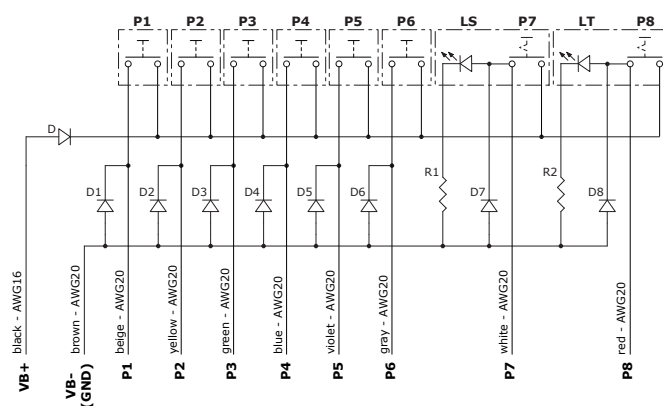



	Code 2IM8010032 Description PTB6000A9-1R1D035-2R1D035-3R1D035-4R1D035-5R1D035-6R1D035 Holder plate 6 push-buttons with spring return (P1...P6) Front zone - Joint Standard for SVM400-430 joystick
---	--

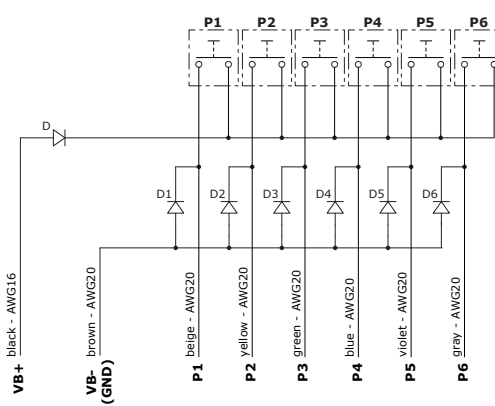

	Code 2IM8010033 Description PTB4000A9-2R1D035-3R1D035-5R1D035-6R1D035 Holder plate 4 push-buttons with spring return (P2-P3-P5-P6) Front zone - Joint Standard for SVM400-430 joystick
---	--

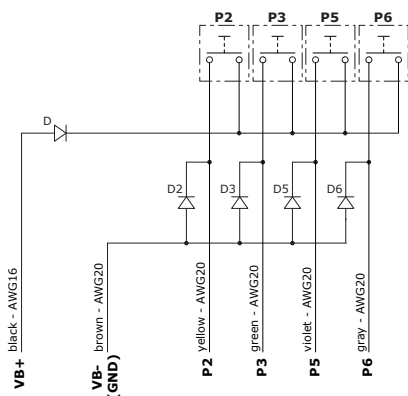

	Code 2IM8020008 Description PTC2000C9-3R1D035-6R1D035-7R1D035-8R1D035 Holder plate 2 push-buttons with spring return (P3-P6) Front zone 2 push-buttons with spring return (P7-P8) Joint Standard for SVM400-430 joystick
---	--

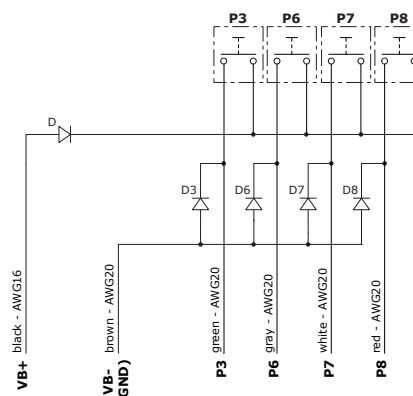

NOTE - For different joint see page 4.
For different handle configurations, contact our Sales Dept.

Configurations



Without “dead man” trigger



Code	2IM8010034
Description	PTB2000C9-3R1D035-6R1D035
Holder plate	2 push-buttons with spring return (P3-P6)
Front zone	-
Joint	Standard for SVM400-430 joystick




Code	2IM8010035
Description	PTB1000D9-3R1D035
Holder plate	1 push-button with spring return (P3)
Front zone	-
Joint	Standard for SVM400-430 joystick

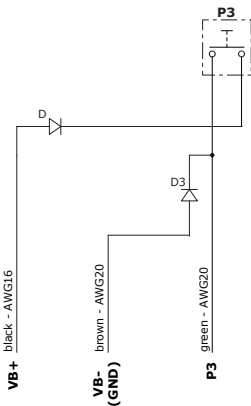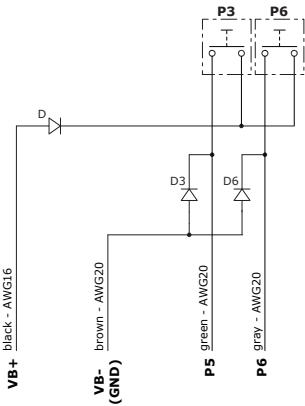




Code	2IM8010036
Description	PTB1000A9-6R1D035
Holder plate	1 push-button with spring return (P6)
Front zone	-
Joint	Standard for SVM400-430 joystick

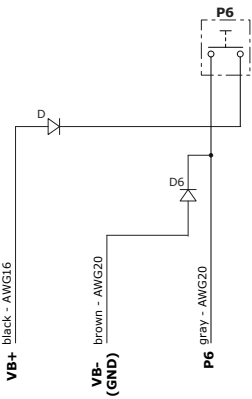




Code	2IM8010037
Description	PTB2020A9-3R1D035-6R1D035-HN6035-KN6035
Holder plate	2 push-buttons with spring return (P3-P6), 2 rocker switches with detent (H-K)
Front zone	-
Joint	Standard for SVM400-430 joystick


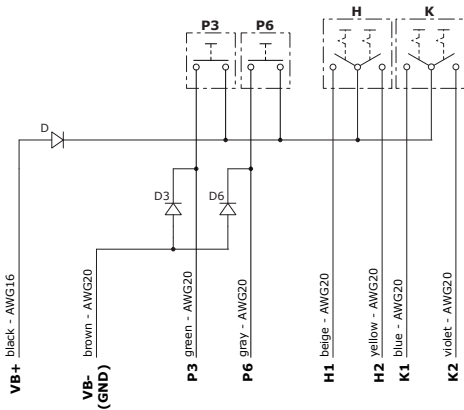


NOTE - For different joint see page 4.
For different handle configurations, contact our Sales Dept.



With "dead man" trigger





Code	2IM8100002
Description	PTA4010F9-0RD035-1R1D035-2R1D035-3R1D035-6R1D035-KRS035
Holder plate	4 push-buttons with spring return (P1-P2-3-P6), 1 FNR rocker switch with detent
Front zone	"Dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick

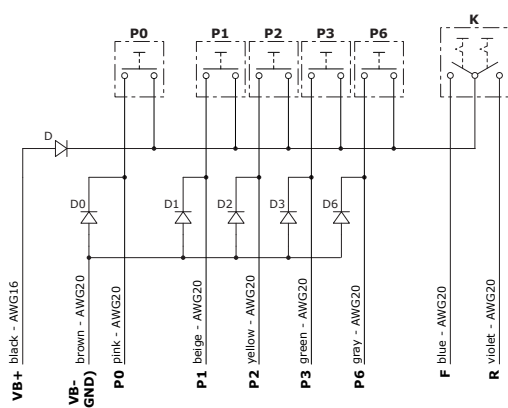


Code	2IM8600007
Description	PZTA4100D9-0RD035-3R1D035-4R1D035-5R1D035-6R1D035-WN130035-(RV)
Holder plate	4 push-buttons with spring return (P3-P4-P5-P6), 1 proportional roller (W)
Front zone	"Dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick

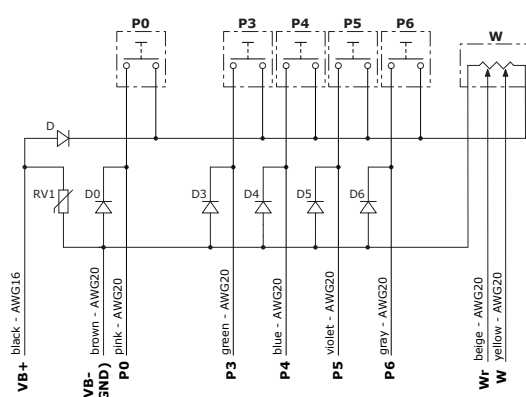

Code	2IM8600008
Description	PZTA4100E9-0RD035-1R1D035-2R1D035-3R1D035-6R1D035-ZN130035-(RV)
Holder plate	4 push-buttons with spring return (P1-P2-P3-P6), 1 proportional roller (Z)
Front zone	"Dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick

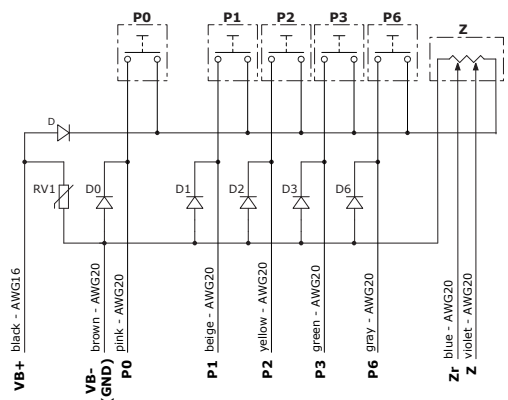

Code	2IM86M0000
Description	PZTM4101A9-0RD035-1R1D035-2R1D035-4R1D035-5R1D035-8R1D035-JN130035-VVL035-(12VDC)-(RV)
Holder plate	4 push-buttons with spring return (P1-P2-P4-P5), 1 proportional roller (J), 1 LED (LV)
Front zone	1 push-button with spring return (P8), "dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick

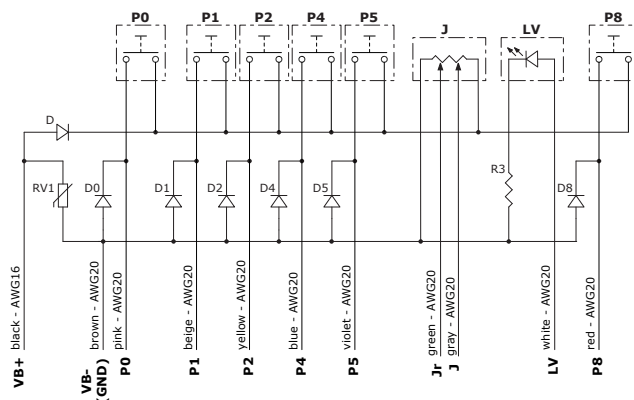


NOTE - For different joint see page 4.



For different handle configurations, contact our Sales Dept.

Configurations



With "dead man" trigger





Code	2IM86M0001
Description	PZTM2200A9-ORD035-3R1D035-6R1D035-8R1D035-WN130035-ZN130035-VVL035-(12VDC)-(RV)
Hold plate	2 push-buttons with spring return (P3-P6), 2 proportional rollers (W-Z), 1 LED (LV)
Frontal zone	1 push-button with spring return (P8), "dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick

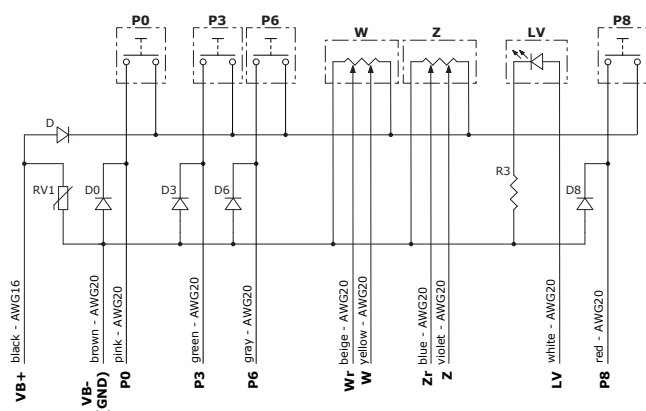


Code	2IM86M0002
Description	PZTM2110C9-ORD035-3R1D035-6R1D035-8R1D035-WN130035-KRS035
Hold plate	2 push-buttons with spring return (P3-P6), 1 proportional roller (W), 1 FNR rocker switch (K)
Frontal zone	1 push-button with spring return (P8), "dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick

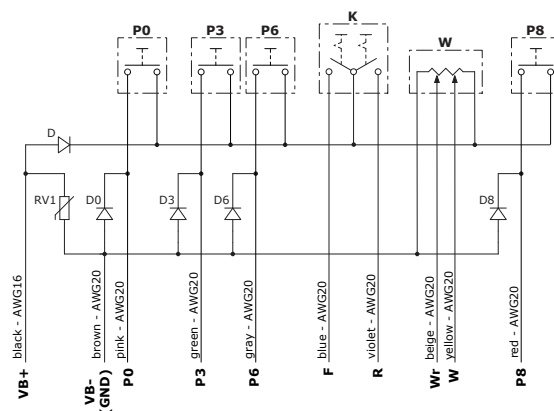

Code	2IM8550004
Description	PZTK0100F9-ORD035-7R1D035-8R1D035-JN130035-(RV)
Hold plate	1 proportional roller (J)
Frontal zone	2 push-buttons with spring return (P7-P8), "dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick

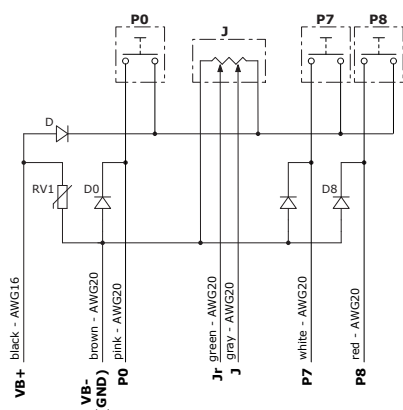

Code	2IM8500007
Description	PZA0200B9-ORD035-WN130035-ZN130035-(RV)
Hold plate	2 proportional rollers (W-Z)
Frontal zone	"dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick

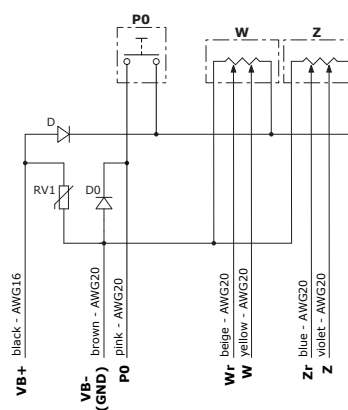

NOTE - For different joint see page 4.
For different handle configurations, contact our Sales Dept.



H series handle

- Ergonomic design
- Ergonomic handle made of thermoplastic material
- Available with different proportional and ON/OFF functions
- Available with or without "dead man" trigger

General features

Shell and plate material	Nylon®
IP weather protection (mounted)	IP44
Ambient temperature	from -20°C to 60°C / from -4°F to 140°F
UV resistance	according to IEC68-2-5, S test C procedure

Electric device features

H type ON/OFF push button

Version	spring return
Contact type	NA
Current rating	2 A resistive @ 12 VDC
Mechanical life (nr. of operations)	10 ⁶
Electric life (nr. of operations)	200x10 ³
Operating force	0.8 N
Weather protection	IP50



HT type ON/OFF push button

Version	spring return
Contact type	NA
Current rating	2 A resistive @ 12 VDC
Mechanical life (nr. of operations)	10 ⁶
Electric life (nr. of operations)	200x10 ³
Operating force	7.5 N
Weather protection	IP64



H type rocker switch

Version	spring return
Contact type	(on)/off/(on)
Current rating	2 A resistive @ 12 VDC
Mechanical life (nr. of operations)	200x10 ⁵
Weather protection	IP44



"Dead man" trigger

Version	spring return
Contact type	NA
Current rating	2 A resistive @ 12 VDC
Mechanical life (nr. of operations)	10 ⁶
Electric life (nr. of operations)	200x10 ³
Operating force	0.8 N
Weather protection	IP50



Proportional roller

Supply	8-32 VDC
Max. current consumption	< 24 mA
Max. output current	1 mA
Output signal (range)	0.5 - 4.5 V
Output signal (central position)	2.5V
Signal tolerance (central position and stroke end)	±100 mV
Minimum load	10 Ω
Actuator deflection angle	± 35° (±1°)
Mechanical life (nr. of operations)	10 ⁶
Operating force	2 N
Mechanical vibration	IEC 68-2
	EN 60068-2-29 (pulse)
Mechanical shock	400m/s ² x 6 ms, 100 times)
Weather protection	IP67-IP69K
EMC compatibility	ISO 13766 - ISO 14982



Rocker switch



Version	with detent
Contact type	on/off
Current rating	2 A resistive @ 12 VDC
Mechanical life (nr. of operations)	10 ⁵
Weather protection	IP44




Cables

Conductor material	copper with tinned ends
Nr. of conductors	up to 12
Conductor section	from AWG16 to AWG20
Insulating material	PVC
Protective covering material	fireproof polyurethane


Dimensions

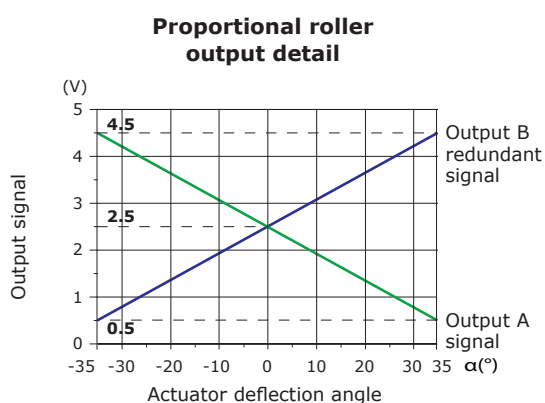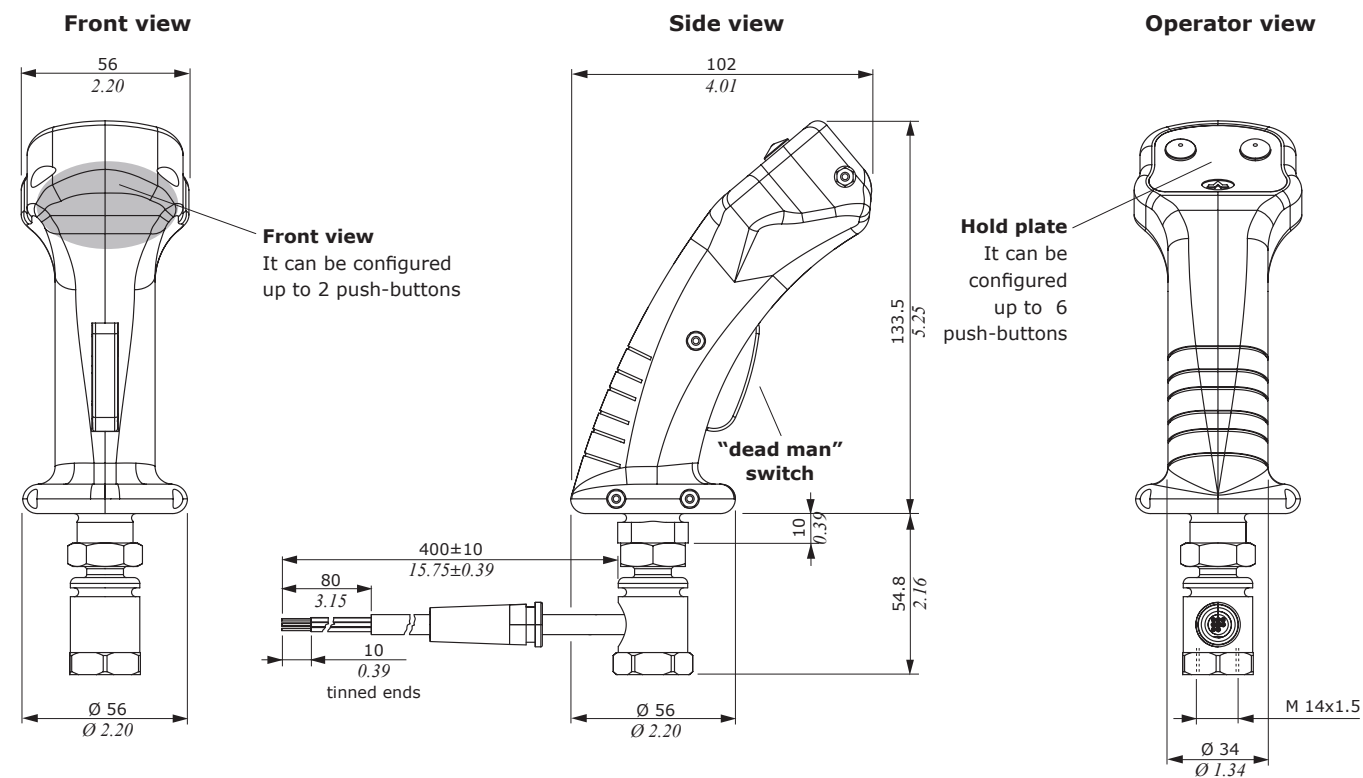


- 1) Half-shell
- 2) Hold plate
- 3) Assembling rod
- 4) Cable

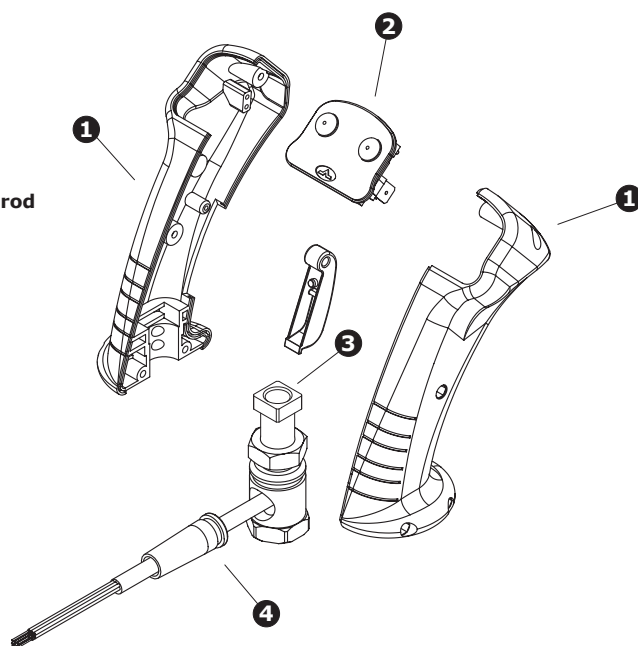



Without "dead man" trigger





Code	2IM4000213
Description	HB009
Holder plate	-
Frontal zone	-
Joint	Standard for SVM400





Code	2IM4000235
Description	HB029-2RD040-4RD040
Holder plate	2 push-buttons with spring return (P2-P4)
Frontal zone	-
Joint	Standard for SVM400-430 joystick

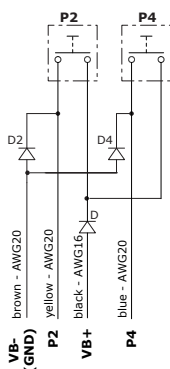


Code	2IM4200017
Description	HC069-1RD040-2RD040-3RD040-4RD040-5RD040-6RD040-7RD040-8RD040
Holder plate	6 push-buttons with spring return (P1...P6)
Frontal zone	2 push-buttons with spring return (P7-P8)
Joint	Standard for SVM400-430 joystick

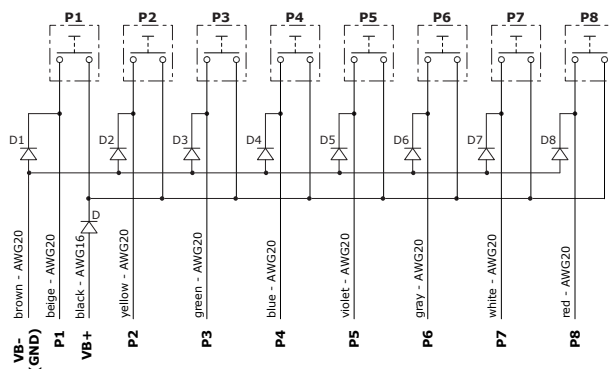

Code	2IM4000201
Description	HB069-1RD040-2RD040-3RD040-4RD040-5RD040-6RD040
Holder plate	6 push-buttons with spring return (P1...P6)
Frontal zone	-
Joint	Standard for SVM400-430 joystick

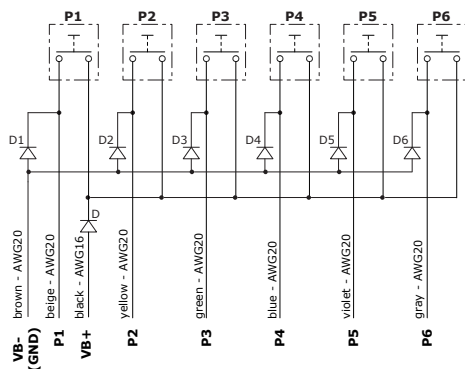

Code	2IM4000221
Description	HB049-2RD040-3RD040-4RD040-6RD040
Holder plate	4 push-buttons with spring return (P2-P3-P4-P6)
Frontal zone	-
Joint	Standard for SVM400-430 joystick

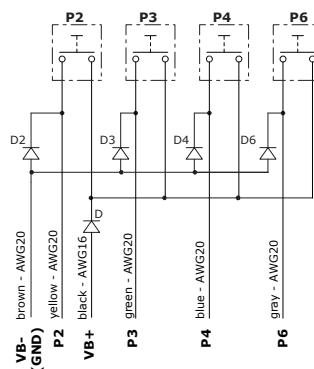

NOTE - For different joint see page 4.


For different handle configurations, contact our Sales Dept.

Configurations


Without "dead man" trigger





Code	2IM4000145
Description	HB529-2RD040-4RD040-9N040-CS
Holder plate	2 push-buttons with spring return (P1-P2), 1 rocker switch with spring return (9)
Frontal zone	-
Joint	Standard for SVM400-430 joystick

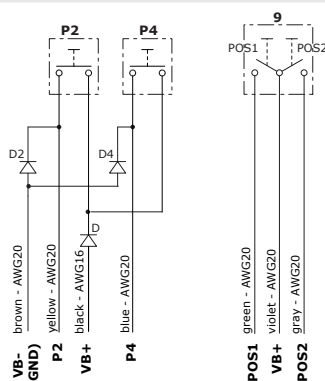


With ON/OFF switch



Code	2IM4700138
Description	HTPB049-PND040-2R1D040-3R1D040-4R1D040-5R1D040
Holder plate	4 push-buttons with spring return (P2-P3-P4-P5)
Frontal zone	ON/OFF switch (P)
Joint	Standard for SVM400-430 joystick

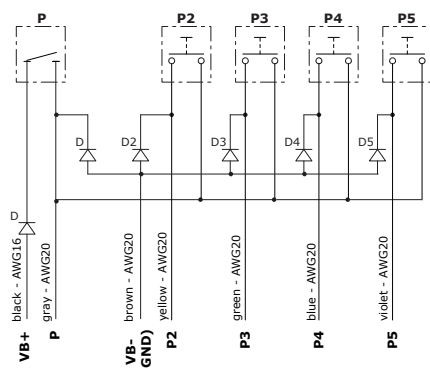


Code	2IM4700139
Description	HTPB039-PND040-1R1D040-4R1D040-5R1D040
Holder plate	3 push-buttons with spring return (P1-P4-P5)
Frontal zone	ON/OFF switch (P)
Joint	Standard for SVM400-430 joystick

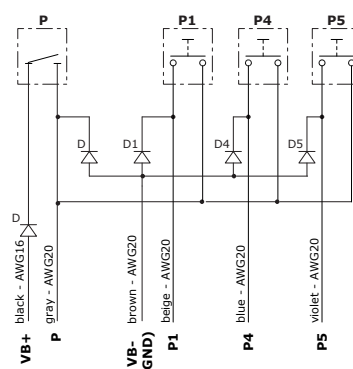



NOTE - For different joint see page 4.

For different handle configurations, contact our Sales Dept.



With ON/OFF switch




Code	2IM4700140
Description	HTPB029-PN040-4R1D040-5R1D040
Holder plate	2 push-buttons with spring return (P4-P5)
Frontal zone	ON/OFF switch (P)
Joint	Standard for SVM400-430 joystick

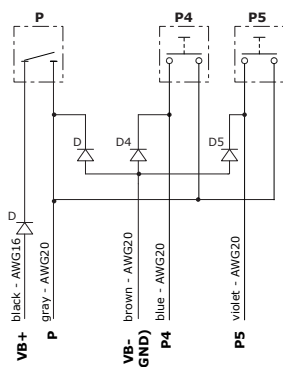

Code	2IM4700141
Description	HTPB019-PN040-1R2D040
Holder plate	1 push-button with spring return (P1)
Frontal zone	ON/OFF switch (P)
Joint	Standard for SVM400-430 joystick

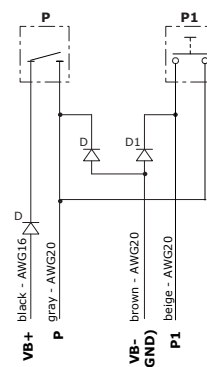


Code	2IM4000309
Description	HJ069-PN040-1RD040-2RD040-3RD040-4RD040-5RD040-6RD040
Holder plate	6 push-buttons with spring return (P1...P6)
Frontal zone	ON/OFF switch (P)
Joint	Standard for SVM400-430 joystick

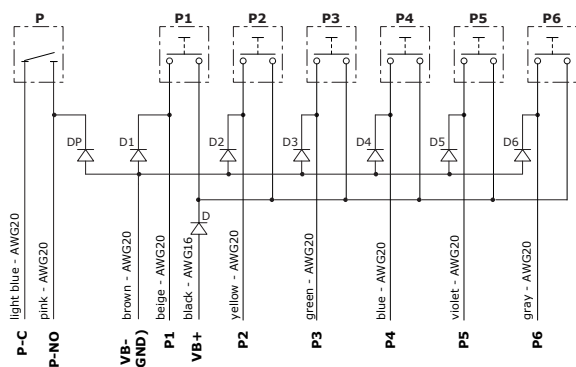



NOTE - For different joint see page 4.
For different handle configurations, contact our Sales Dept.

Configurations



With "dead man" trigger





Code	2IM4100075
Description	HA009-ORD040
Holder plate	-
Frontal zone	"Dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick




Code	2IM4100109
Description	HA029-ORD040-2RD040-4RD040
Holder plate	2 push-buttons with spring return (P2-P4)
Frontal zone	"Dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick

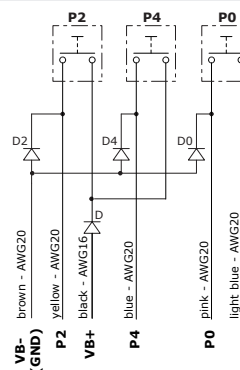

Code	2IM4800022
Description	HZA9-ORD040-JN130040-(RV)
Holder plate	Proportional roller (J)
Frontal zone	"Dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick

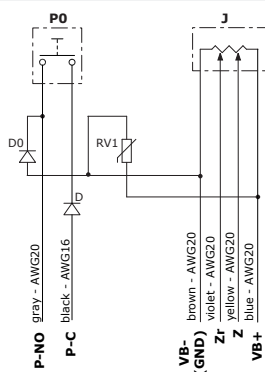

Code	2IM4800023
Description	HZA9-ORD040-ZN130040-(RV)
Holder plate	Proportional roller (Z)
Frontal zone	"Dead man" trigger (P0)
Joint	Standard for SVM400-430 joystick

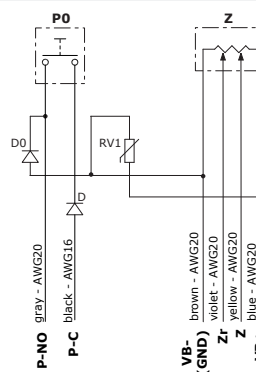

NOTE - For different joint see page 4.
For different handle configurations, contact our Sales Dept.



S series handle

- Ergonomic design
- Rubber coating
- Robust construction, reliability and weather resistance
- Proportional switch option rocker


General features

Covering material	Thermoplastic elastomer
Core material	Polyamide 6.6
IP weather protection (assembled)	IP67
Ambient temperature	from -20°C to 50°C / from -4°F to 122°F
UV resistance	according to IEC68-2-5, S test C procedure

Electric devices features

Trigger and clacson push-button

Version	spring return
Contact type	NO
Current rating	7 A resistive
	4 A inductive @ 28 VDC
Mechanical life (nr. of operations)	10 ⁶
Electric life (nr. of operations)	5x10 ⁵
Operating force	0.8 N
Weather protection	IP50



Proportional roller with ratiometric signal

Supply	12VDC
Output signal (range)	3.5 - 8.5 V
Output signal (central position)	6V
Signal tolerance (central position and stroke end)	±1 %
Nominal resistance	5 KΩ
Actuator deflection angle	160° (±5°)
Mechanical life (nr. of operations)	10 ⁷



ON/OFF push-button

Version	Spring return
Contact type	NO
Current rating	5 A resistive
	3 A inductive @ 28 VDC
Mechanical life (nr. of operations)	10 ⁶
Electric life (nr. of operations)	25x10 ³
Weather protection	IP64



Proportional roller (ARW)

Supply	8-32 VDC
Max. current consumption	< 24 mA
Max. output current	1 mA
Output signal (range)	0.5 - 4.5 V
Output signal (central position)	2.5V
Signal tolerance (central position and stroke end)	±100 mV
Minimum load	10 Ω
Actuator deflection angle	± 35° (±1°)
Mechanical life (nr. of operations)	10 ⁶
Operating force	2 N
Mechanical vibration	IEC 68-2
Mechanical shock	EN 60068-2-29 (pulse
	400m/s ² x 6 ms, 100 times)
Weather protection	IP67-IP69K
EMC	ISO 13766 - ISO 14982




Cables

Conductor material	copper with tinned ends
Conductor section	AWG18
Insulating material	PVC
Protective covering material	PVC


Dimensions

With proportional roller with ratiometric signal


Front view

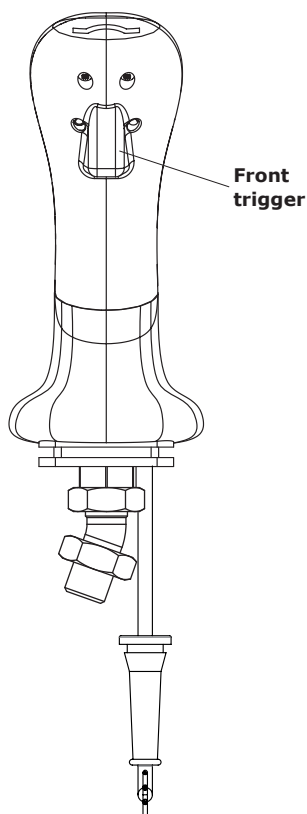




Side view

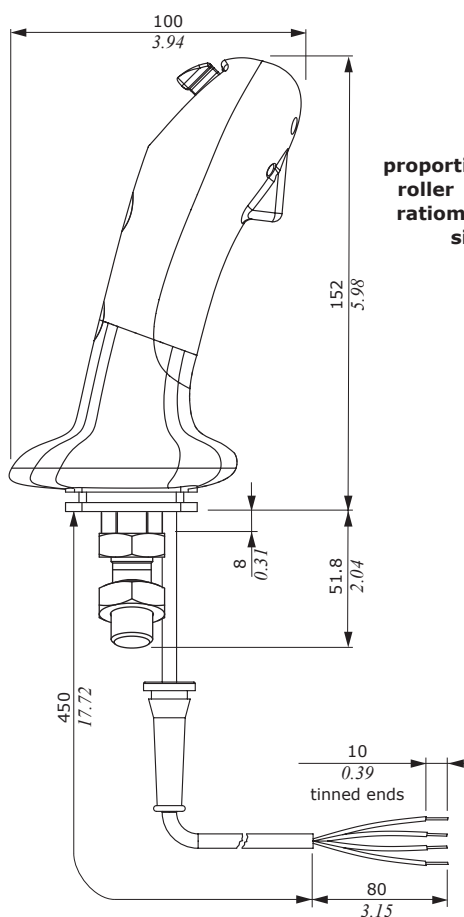


Operator view

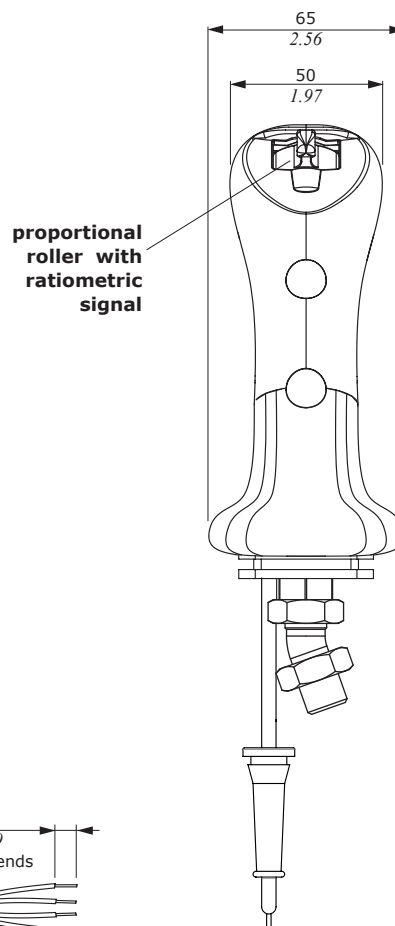


Proportional roller output detail

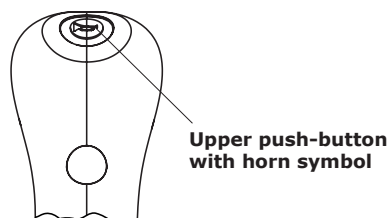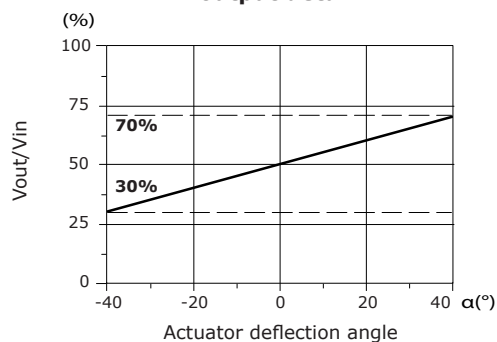


With proportional roller with ratiometric signal




Code	2IM5000000
Description	S007
Configuration	Without control devices
Joint	Sloping 19° left for SVM400-430 joystick

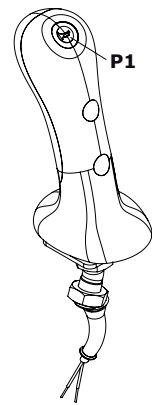

Code	2IM5100002
Description	S107-045
Configuration	With upper push-button with horn symbol (P1)
Joint	Sloping 19° left for SVM400-430 joystick




VB- (GND) brown - AWG18
VB+ red - AWG18

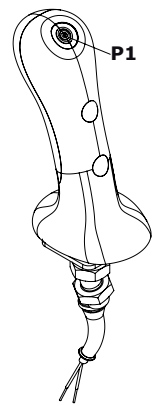


Code	2IM5120001
Description	S10A8-045
Configuration	With upper push-button without horn symbol (P1)
Joint	Sloping 19° right for SVM400-430 joystick




P1
VB- (GND) brown - AWG18
VB+ red - AWG18

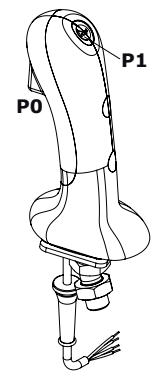


Code	2IM5210002
Description	S218-045
Configuration	With upper push-button with horn symbol (P1) and front trigger (P0)
Joint	Sloping 19° right for SVM400-430 joystick




P1
VB- (GND) brown - AWG18
VB+ red - AWG18
P0
VB- (GND) white - AWG18
VB+ black - AWG18

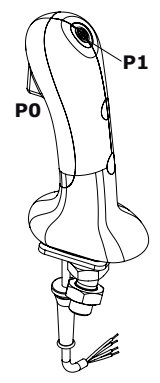


Code	2IM5210003
Description	S21A7-045
Configuration	With upper push-button without horn symbol (P1) and front trigger (P0)
Joint	Sloping 19° left for SVM400-430 joystick



P1
VB- (GND) brown - AWG18
VB+ red - AWG18
P0
VB- (GND) white - AWG18
VB+ black - AWG18

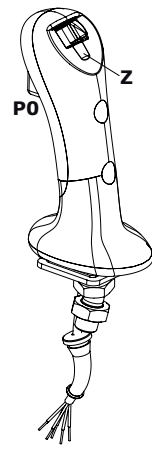

Code	2IM5110003
Description	S117-045
Configuration	With proportional roller (Z) and front trigger (P0)
Joint	Sloping 19° left for SVM400-430 joystick




P0
VB- (GND) brown - AWG18
VB+ red - AWG18
Z
VB- (GND) white - AWG18
W green - AWG18
VB+ black - AWG18


NOTE - For different joint see page 4.
For different handle configurations, contact our Sales Dept.

Dimensions

With ARW proportional roller

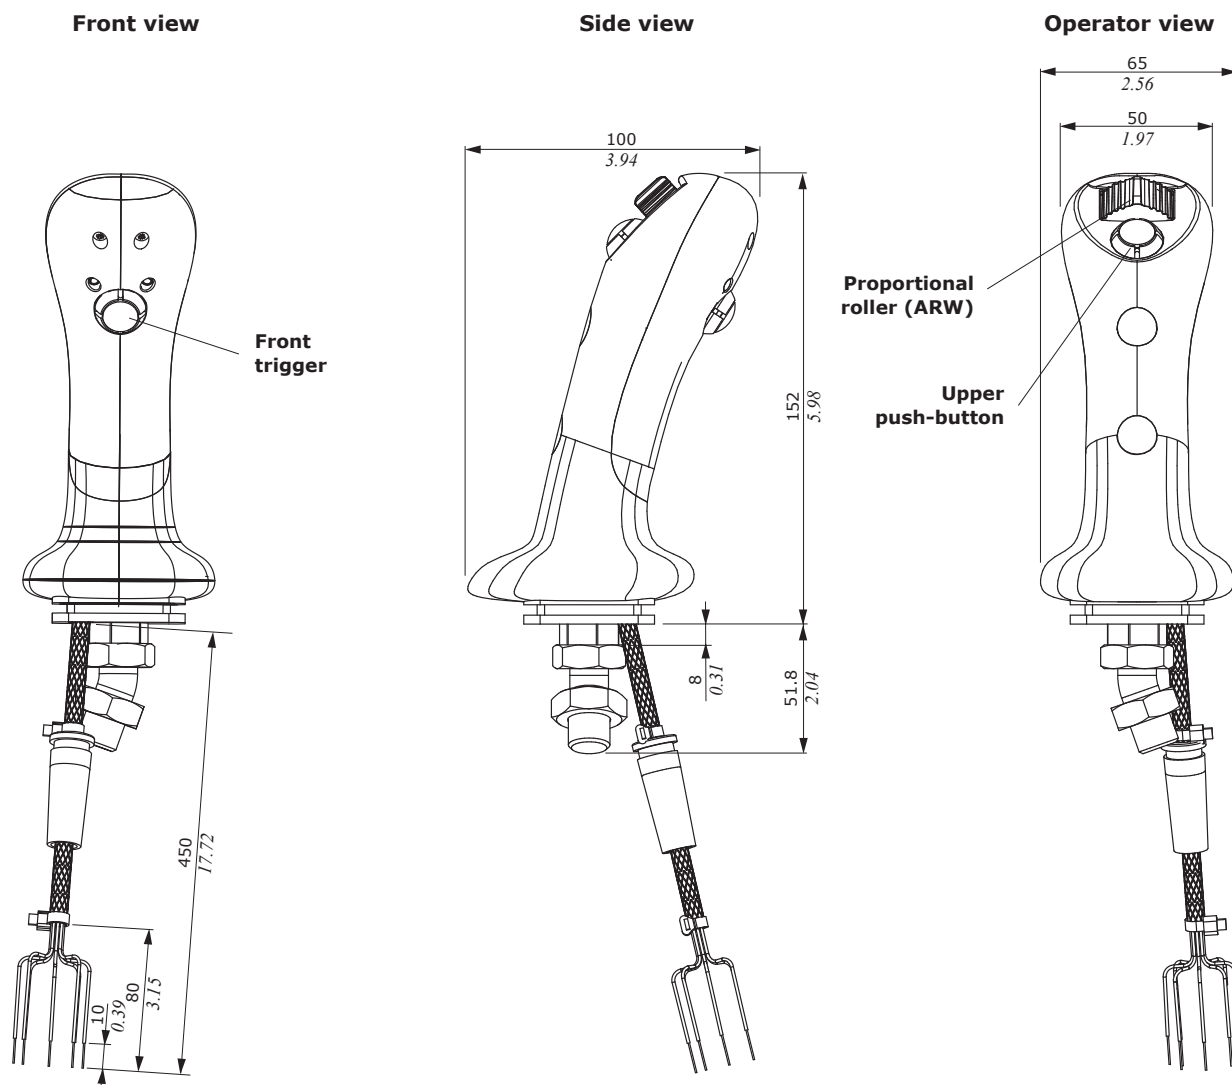


Proportional roller output detail

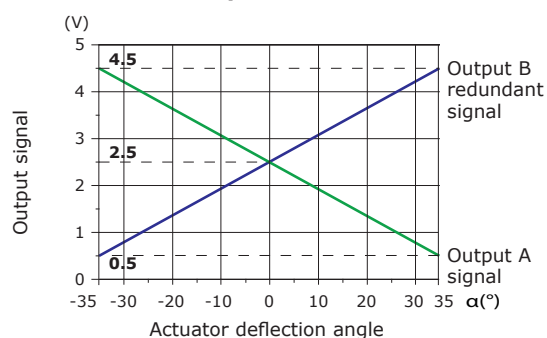

Configurations



With ARW proportional roller

Code **2IM5300000**

Description SZ8-XG122045

Configuration With ARW proportional roller (X)


Joint Sloping 19° right for SVM400-430 joystick

Code **2IM5320000**

Description SZTB8-1G4045-XG122045

Configuration With ARW proportional roller (X) and thumb type upper push-button (P1)



Joint Sloping 19° right for SVM400-430 joystick

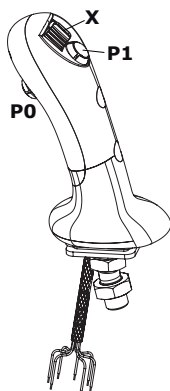Code **2IM5330003**

Description SZTC8-0G4045-1G4045-XG122045

Configuration With ARW prop.roller (X), thumb type upper push-button (P1) and front trigger (P0)



Joint Sloping 19° right for SVM400-430 joystick

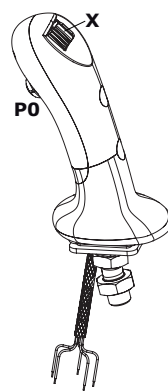Code **2IM5310003**

Description SZTA8-0G4045-XG122045

Configuration With ARW proportional roller (X) and front trigger (P0)



Joint Sloping 19° right for SVM400-430 joystick

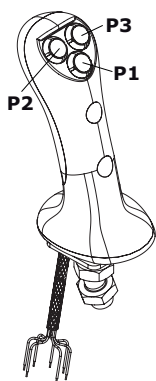Code **2IM5440000**

Description STB38-1RB045-2RB045-3RB045

Configuration With 3 upper push-buttons (P1-P2-P3)

Joint Sloping 19° right for SVM400-430 joystick

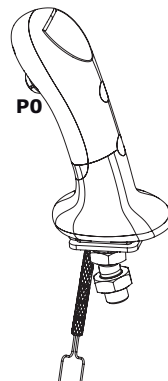Code **2IM5410001**

Description STA8-0G4045

Configuration With front trigger (P0)

Joint Sloping 19° right for SVM400-430 joystick



NOTE - For different joint see page 4.

For different handle configurations, contact our Sales Dept.

Configurations

With ARW proportional roller

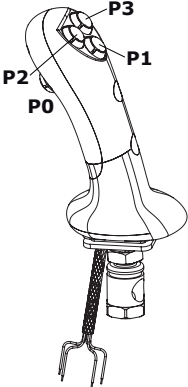


Diagram of the S series handle showing push-buttons P0, P1, P2, and P3.

Code	2IM5430000
Description	STC39-0RB045-1RB045-2RB045-3RB045
Configuration	With 3 upper push-buttons and front trigger (P1-P2-P3) and front trigger (P0)
Joint	Standard for SVM400 joystick

P0	P1	P2	P3
VB- (GND)	VB- (GND)	VB- (GND)	VB- (GND)

NOTE - For different joint see page 4.
For different handle configurations, contact our Sales Dept.



V series handle

- Ergonomic design with elastomericated rubber
- Available with ON/OFF push-button

General features

Covering material	elastomericated rubber
Core material	Nylon®
IP weather protection (assembled)	IP44
Ambient temperature	from -20°C to 60°C / from -4°F to 140°F

Electric devices features

ON/OFF push-button


Version	spring return
Contact type	NO
Current rating	4 A resistive @ 24 VDC
Electric life (nr. of operations)	10 ⁴
Weather protection	IP44




Cables

Conductor material	Copper with tinned ends
Nr. of conductors	from 2 to 3
Conductor section	AWG20
Insulating material	PVC
Protective covering material	polyolefin


Dimensions

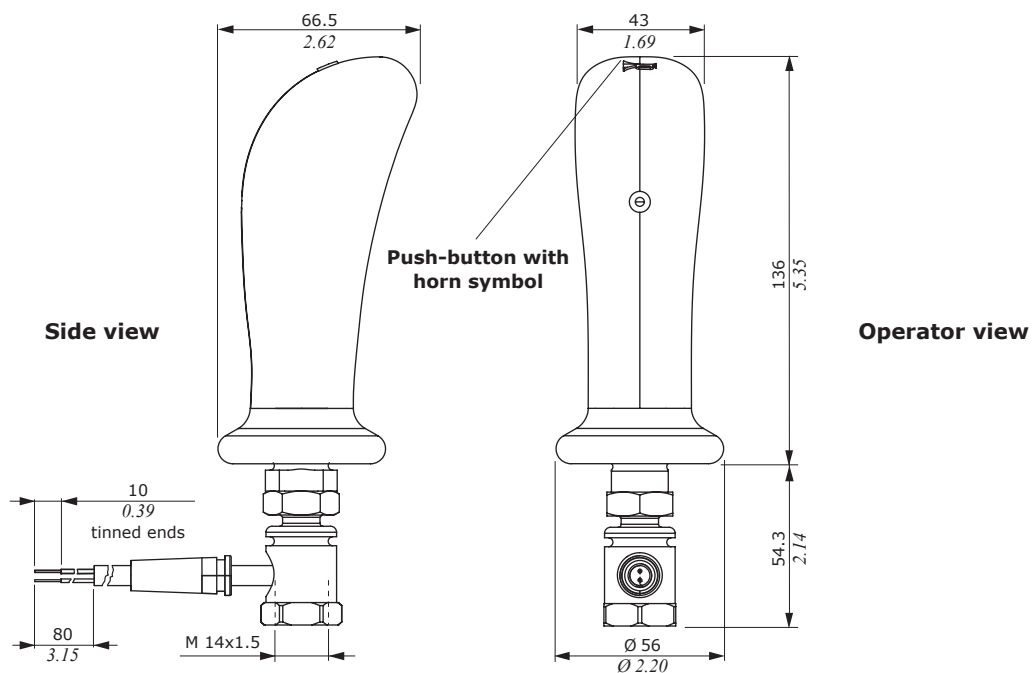

Configurations

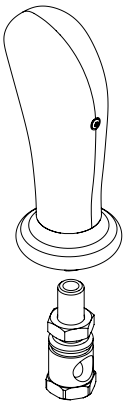


Code	5IMP030011
Description	V009
Configuration	Without push-button
Joint	Standard for SVM400-430 joystick

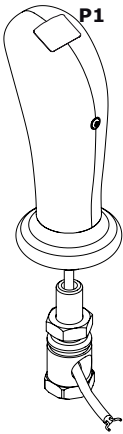

Code	5IMP032012
Description	V209-045
Configuration	Push-button with spring return without horn symbol (P1)
Joint	Standard for SVM400-430 joystick

A wiring diagram showing a rectangular box labeled 'P1' with two terminals. Below the box, two wires are shown: a black wire labeled 'black - AWG20' and a gray wire labeled 'gray - AWG20'.

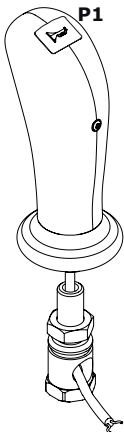

Code	5IMP031160
Description	V109-045
Configuration	Push button with spring return with horn symbol (P1)
Joint	Standard for SVM400-430 joystick

A wiring diagram showing a rectangular box labeled 'P1' with two terminals. Below the box, two wires are shown: a black wire labeled 'black - AWG20' and a gray wire labeled 'gray - AWG20'.

NOTE - For different joint see page 4.
For different handle configurations, contact our Sales Dept.



Handle Series J

- Cylindrical Ø 30 mm / Ø 1.18 in Nylon®
- ON/OFF control with push button or rocker switch

General features

Cap material	Neoprene
Body material	Nylon®
IP weather protection (assembled)	IP44
Ambient temperature	from -20°C to 60°C / from -4°F to 140°F

Electric devices features


ON/OFF push-button

Version	Spring return
Contact type	NO
Current rating	6 A resistive - @ 30 VDC
Electric life (nr. of operations)	5x10 ⁴

Cables


Conductor material	Copper with tinned ends
Conductor section	AWG20
Insulating material	PVC
Protective covering material	PVC

Dimensions

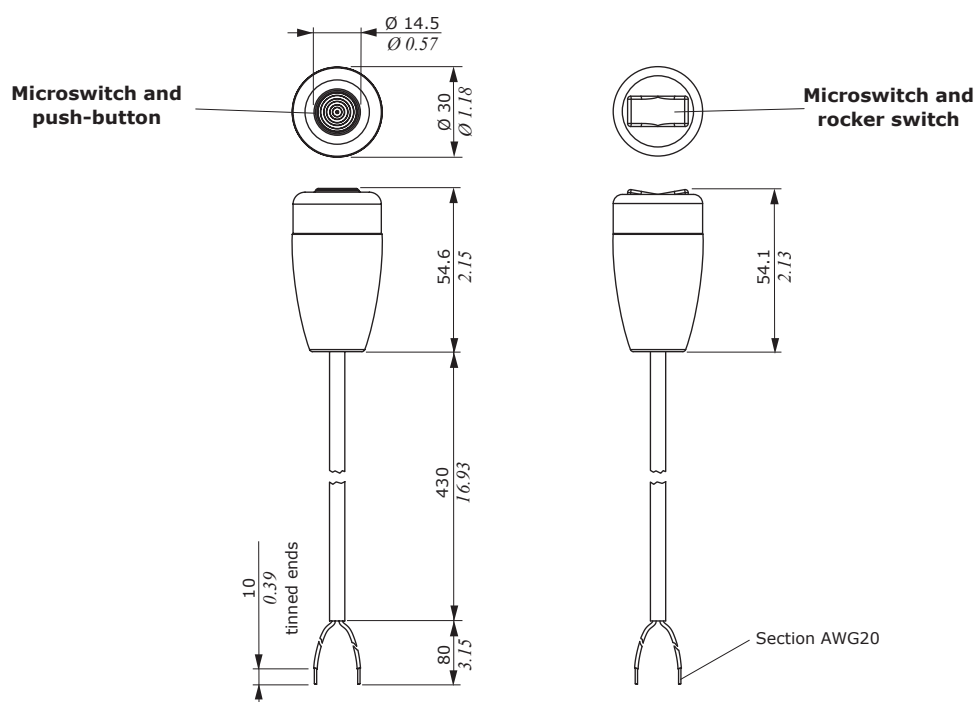


Configurations

Push-button control



Code	5IMP110000
Description	JJI/C
Configuration	Push-button control
Scheme	

Rocker switch control



Code	5IMP210000	5IMP310000	5IMP410000	5IMP510000	5IMP610000
Description	JLI/C	JMI/C	JNI/C	JPI/C	JQI/C
Configuration	ON/OFF detent	ON/OFF/ON detent	(OFF)/ON Spring return	(ON)/OFF/ON Spring return in one direction and detent in the other direction	(ON)/OFF/(ON) Spring return
Scheme					

NOTE - For different joint see page 4.

For different handle configurations, contact our Sales Dept.



Handle 10 series

- Cylindrical Ø 39 mm / Ø 1.53 in in Nylon®
- ON/OFF control with push button or rocker switch

General features

Cap material	Neoprene
Body material	Nylon®
IP weather protection (assembled)	IP44
Ambient temperature	from -20°C to 60°C / from -4°F to 140°F

Electric devices features

ON/OFF push-button


Version	spring return
Contact type	NA
Current rating	6 A resistive - 4 A inductive @ 30 VDC
Mechanical life (nr. of operations)	3x10 ⁶
Electric life (nr. of operations)	10 ⁵
Weather protection	IP54

Cables


Conductor material	Copper with tinned ends
Conductor section	AWG20
Insulating material	PVC
Protective covering material	PVC

Dimensions

Microswitch and
push-button

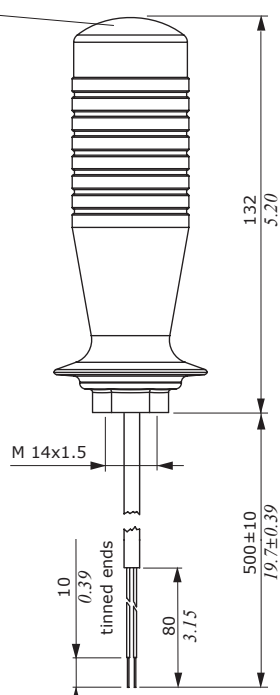


Microswitch and
rocker switch

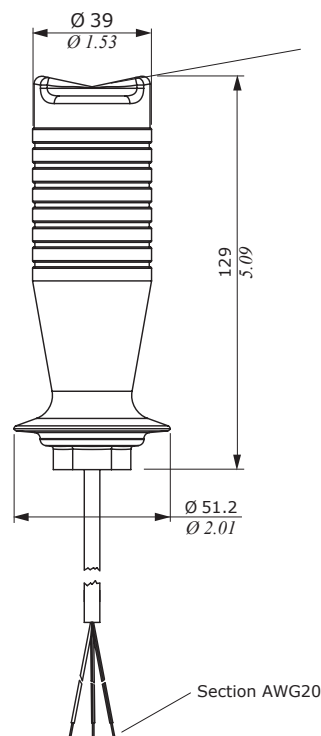


Configurations

No push-button control




Code	5IMP100000
Description	WI
Configuration	Without push-button

Push-button control



Code	5IMP200000	5IMP500000
Description	XI/C	KI/C
Configuration	(ON)/OFF type	(ON)/OFF type with protection
Scheme		

Rocker switch control



Code	5IMP600000	5IMP400000	5IMP300000
Description	TI/C	YI/C	ZI/C
Configuration	ON/OFF/ON type	(ON)/OFF/(ON) type	ON/OFF type
Scheme			

NOTE - For different joint see page 4.
For different handle configurations, contact our Sales Dept.



Handlevers

- Lengths from 120 to 400 mm / *from 4.72 to 15.75 in* with thread M8, M10, M12
- Available with different models of handles

General features

Rod material	zinc-coated steel
Knob material	thermoplastic or thermosetting resins
Ambient temperature	from -20°C to 60°C / <i>from -4°F to 140°F</i>

NOTE - For different conditions, please contact our Sales Dept

Without microswitches

AL00: without handles




F	h (thread)		l		d	Code
M8	19	0.75	120	4.72	8 0.32	170011214
			150	5.91		170011215
			200	7.87		170011220
			250	9.84		170011225
M10	24	0.94	150	4.72	10 0.39	170012215
			200	7.87		170012220
			250	9.84		170012224
			300	11.8		170012230

AL02: black moulded thermoplastic resin knob with pressure mounting



F	h (thread)		l		Code
M8	18	0.71	158	6.22	170011216
M10	22	0.87	159	6.26	170012016
			209	8.23	170012022
M12	28	1.10	219	8.62	170013021


AL01: black cylindrical thermoplastic resin knob with pressure mounting

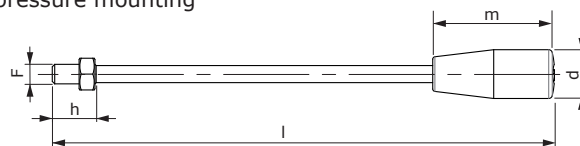

F	h (thread)		l		d		m		Code
M8	18	0.71	127	5.00	20	0.79	50	1.97	170011012
	18	0.71	157	6.18					170011015
	18	0.71	206	8.11					170011020
	19	0.75	256	10.08					170011226
	19	0.75	306	12.05					170011230
	19	0.75	356	14.01					170011236
	19	0.75	406	15.98					170011241
M10	22	0.87	156	6.14	22	0.87	60	2.36	170012015
			206	8.11					170012020
			256	10.08					170012025
			306	12.05					170012030
			356	14.01					170012035
			406	15.98					170012040
M12	28	0.71	206	8.11	26	1.02	72	2.83	170013020
			256	10.08					170013025
			306	12.05					170013030
			356	14.01					170013035
			406	15.98					170013040


Without microswitches

AL03: red moulded thermoplastic resin knob with pressure mounting

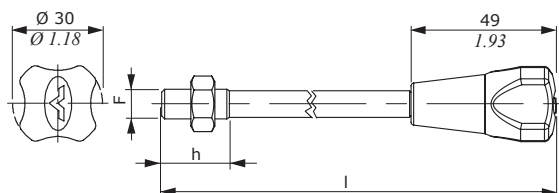


F	h (thread)		l		Code
M8	18	0.71	158	6.22	170011217
M10	22	0.87	158	6.22	170012017
			208	8.19	170012023

AL04: black spherical thermosetting resin knob with pressure mounting

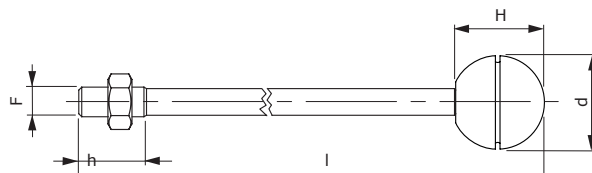


F	h (thread)	l	d	m	Code
M10	22	0.87	210	7.87	170012223
			260	9.84	170012226
M12	28	1.10	220	7.87	170013019
			270	9.84	170013027

AL06: black spherical thermosetting resin knob with portlight and pressure mounting

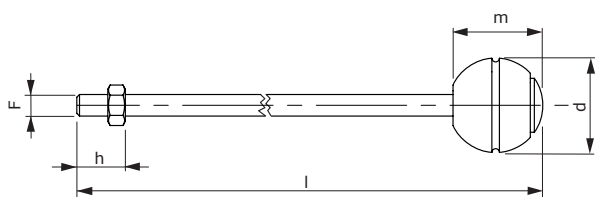


F	h (thread)		l		d		m		Code
M8	19	0.75	220	8.66	35	1.38	33.5	1.32	170011255
M10	22	0.87	220	8.66	40	1.57	38.5	1.52	170012221

AL07: black ogival thermosetting resin knob with portlight and pressure mounting

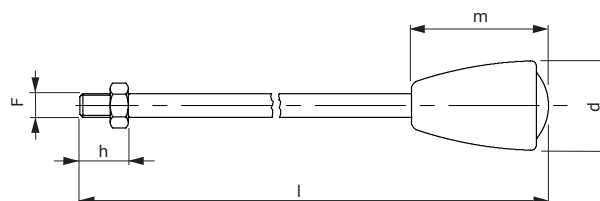


F	h (thread)		l		d		m		Code
M8	19	0.75	163	6.42	32	1.26	45	1.77	170011219
			213	8.38					170011222
M10	22	0.86	224	8.82	32	1.26	49	1.93	170012222

AL08: Black ogival thermosetting resin knob with M10 thread mounting

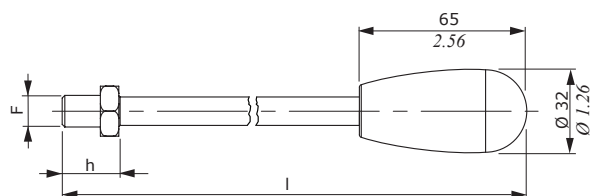


F	h (thread)		l	Code	
M12	22	0.87	160	6.30	170013115
			210	8.27	170013120
			260	10.24	170013125
			310	12.20	170013130
			361	14.21	170013135

AL11: black thermoplastic resin knob, injection molded on rod

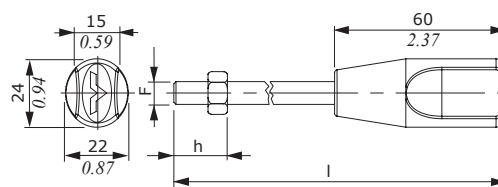

F	h (thread)		l	Code	
M8	19	0.43	162	6.38	170408150
	19	0.43	212	8.35	170408200
	24	0.94	250	9.84	170408250
M10			165	6.50	170410150
	24	0.94	215	8.46	170410200
			265	10.43	170410250


With microswitch and J series handle

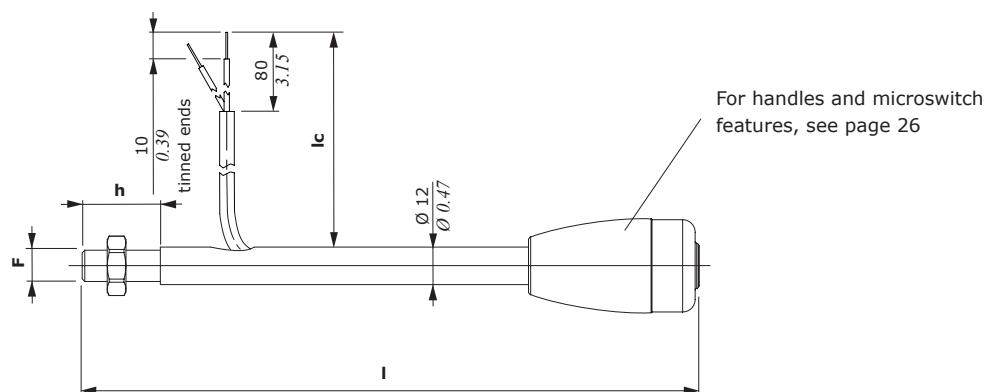

Type	knob (page 26)	F=M10							F=M12						
		h (thread)		I	lc		Code	h (thread)		I	lc		Code		
AL24	JJ type	25	0.98	150	5.91	480	18.9	1702J2415	25	0.98	200	7.87	430	16.9	1702J3420
				200	7.87	430	16.9	1702J2420			250	9.84	380	15.0	1702J3425
AL25	JL type	25	0.98	150	5.91	480	18.9	1702L2415	25	0.98	200	7.87	430	16.9	1702L3420
				200	7.87	430	16.9	1702L2420			250	9.84	380	15.0	1702L3425
AL26	JM type	25	0.98	150	5.91	480	18.9	1702M2415	25	0.98	200	7.87	430	16.9	1702M3420
				200	7.87	430	16.9	1702M2420			250	9.84	380	15.0	1702M3425
AL27	JN type	25	0.98	150	5.91	480	18.9	1702N2415	25	0.98	200	7.87	430	16.9	1702N3420
				200	7.87	430	16.9	1702N2420			250	9.84	380	15.0	1702N3425
AL28	JP type	25	0.98	150	5.91	480	18.9	1702P2415	25	0.98	200	7.87	430	16.9	1702P3420
				200	7.87	430	16.9	1702P2420			250	9.84	380	15.0	1702P3425
AL29	JQ type	25	0.98	150	5.91	480	18.9	1702Q2415	25	0.98	200	7.87	430	16.9	1702Q3420
				200	7.87	430	16.9	1702Q2420			250	9.84	380	15.0	1702Q3425

NOTE - For uncoded configurations or cables with no standard lenght, contact our Sales Dept.


With microswitch and 10 series handle

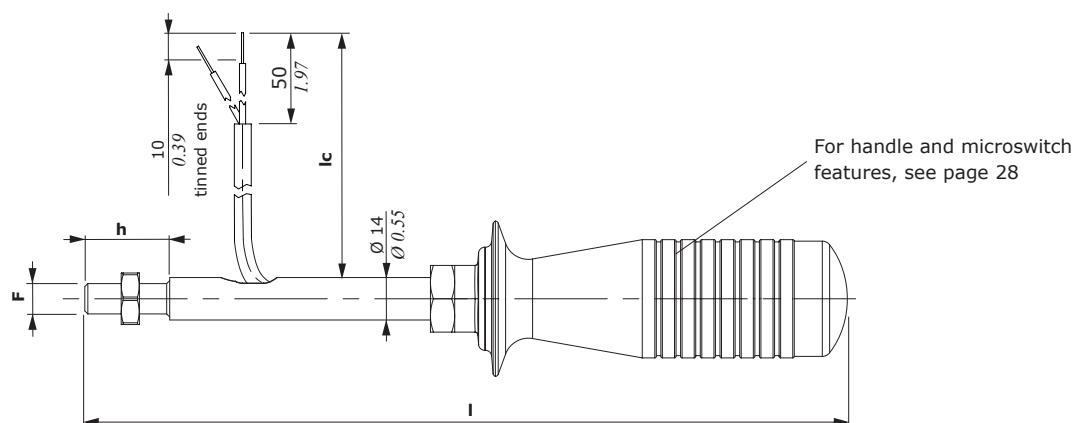

Type	Handle (page 28)	F=M10						F=M12							
		h (thread)		I		lc	Code	h (thread)		I		lc	Code		
AL14	W type	28	1.10	250	9.84		/	1701W2525	25	0.98	250	9.84		/	1701W3525
				250	9.84	425	16.7	1701X2525			250	9.84	425	16.7	1701X3525
AL15	X type	25	0.98	300	11.8	375	14.8	1701X2530	25	0.98	300	11.8	375	14.8	1701X3530
				350	13.8	325	12.8	1701X2535			350	13.8	325	12.8	1701X3535
AL16	Z type	25	0.98	250	9.84	425	16.7	1701Z2525	25	0.98	250	9.84	425	16.7	1701Z3525
				300	11.8	375	14.8	1701Z2530			300	11.8	375	14.8	1701Z3530
				350	13.8	325	12.8	1701Z2535			350	13.8	325	12.8	1701Z3535
				250	9.84	425	16.7	1701Y2525			250	9.84	425	16.7	1701Y3525
AL17	Y type	25	0.98	300	11.8	375	14.8	1701Y2530	25	0.98	300	11.8	375	14.8	1701Y3530
				350	13.8	325	12.8	1701Y2535			350	13.8	325	12.8	1701Y3535
AL18	K type	25	0.98	250	9.84	425	16.7	1701K2525	25	0.98	250	9.84	425	16.7	1701K3525
				300	11.8	375	14.8	1701K2530			300	11.8	375	14.8	1701K3530
				350	13.8	325	12.8	1701K2535			350	13.8	325	12.8	1701K3535
				250	9.84	425	16.7	1701T2525			250	9.84	425	16.7	1701T3525
AL19	T type	25	0.98	300	11.8	375	14.8	1701T2530	25	0.98	300	11.8	375	14.8	1701T3530
				350	13.8	325	12.8	1701T2535			350	13.8	325	12.8	1701T3535

NOTE - For uncoded configurations or cables with no standard lenght, contact our Sales Dept.

Handlever with P series handle

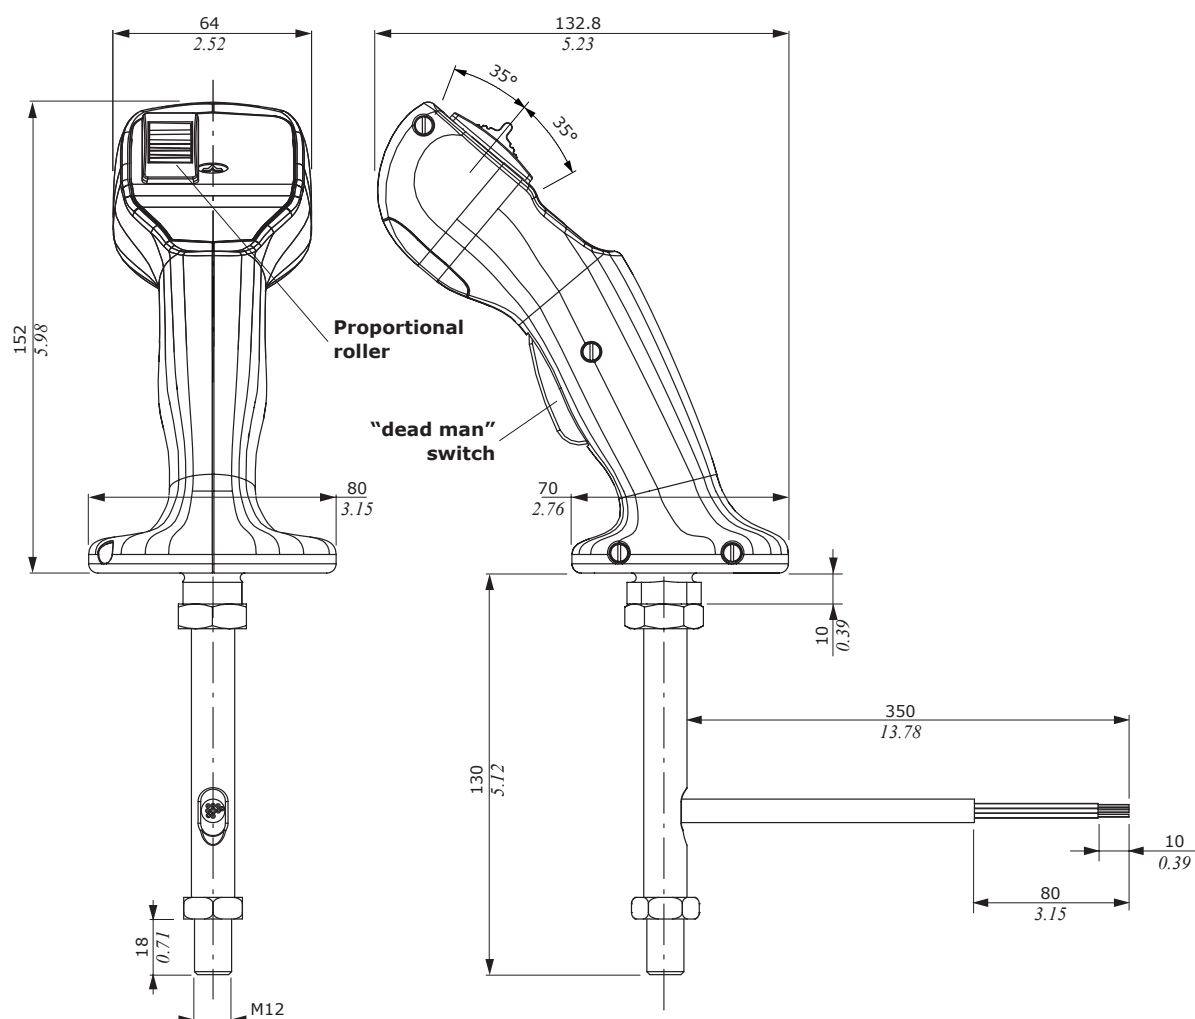


Handlever with P series handle

Configurations




Code	170800068
Description	AL80-PZA0100D0-ORD035-WN130035(RV)-M12x280
Plate	1 proportional roller (W)
Frontal zone	"Dead man" switch (P0)
Lever	M12x280

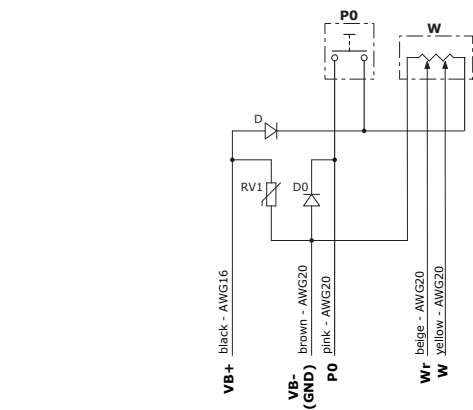



Code	170800036
Description	AL80-PZMM0200B0-ORD035-8R2D035-WN130035-ZN130035-(D2F12)-(TC-PROT)-M12x280
Plate	2 proportional rollers (W-Z)
Frontal zone	"Dead man" switch (P0), 1 push-button with spring return (P8)
Lever	M12x280

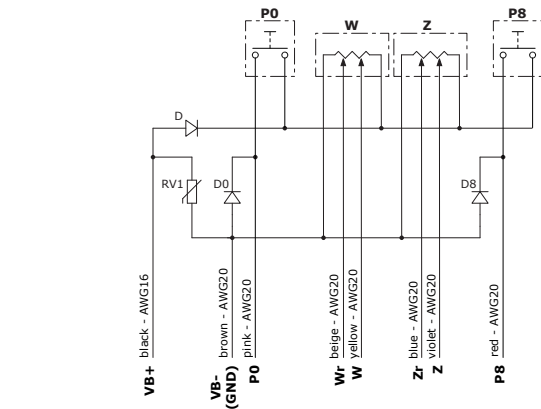

NOTE - For different joint see page 4.
For different handle configurations, contact our Sales Dept.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

2nd edition March 2015

WWW.WALVOIL.COM

D1WWEH01E

