



CBC AIR FILTERS

DESCRIPTION

Air breather filter, extension tube available on request

MATERIALS

Housing: Plastic

Basket: Plastic

Seal: NBR Nitrile

Spare filter element: Impregnated Cellulose 3µm

(Filtration degree in air)

FLOW RATE

Qmax 1800 l/min

COMPATIBLY

Full with fluids HH-HL-HM-HV-HTG (according to ISO 6743/4).


For fluids different than the above mentioned, please contact our Customer Service.

WORKING TEMPERATURE

From -25°C to 110°C



HYDRAULIC DIAGRAM




Is this datasheet the latest release? Please check on our website

ORDERING AND OPTION CHART

C	B	C	COMPLETE FILTER FAMILY		FILTER ELEMENT FAMILY	E	B	C
2	1		SIZE & LENGHT	21	SIZE & LENGTH	2	1	
			CONNECTION TYPE					
			S = flange	S				
			PORT SIZE					
			00 = DIN 24557/2	00				
W			PRESSURIZATION VALVE					
			W = without	W				
N			SEALS		SEALS	N		
			N = NBR Nitrile	N				
C	C		FILTER MEDIA		FILTER MEDIA	C	C	
			CC = impregnated cellulose 3 µm	CC				
W			ACCESSORIES					
			W = without	W				

INSTALLATION DRAWING

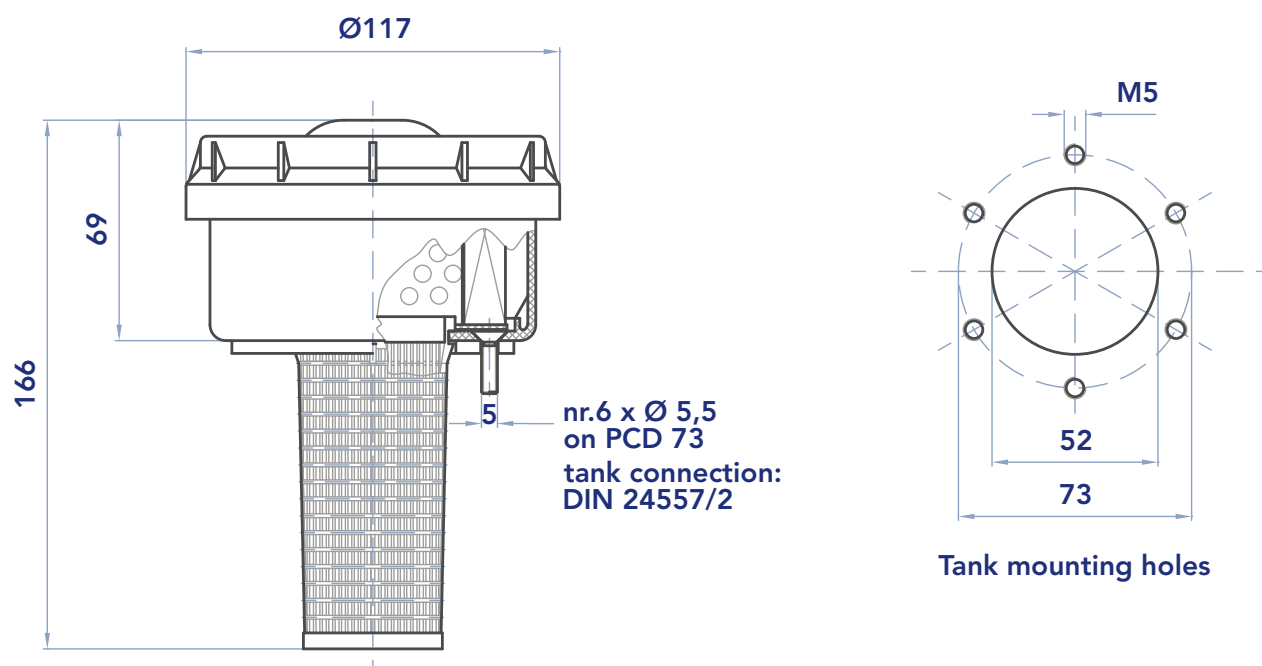

ACCESSORY (TO BE ORDERED SEPARATELY)

ORDER PART NUMBER: **CEA20NXX**

DESCRIPTION: EXTENSION TUBE FOR FILLER BREATHER CEA20NXX

Very helpful to avoid oil leakage from the breather due to oil vapors or tilt in the tank

Fits any filler breather with DIN 24557-2 flange

